




## PN16 High Pressure Ss Ball Valves PN16 Manual Hard Seal

Our Product Introduction

for more products please visit us on [fbballvalve.com](http://fbballvalve.com)

### Basic Information

- Place of Origin: China
- Brand Name: FABIA
- Certification: ISO9001,CE,CCS,DNV
- Model Number: 1/8 inch 36 inch
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Cartons/Wooden cases
- Delivery Time: 15-30 work days
- Payment Terms: L/C,D/A,D/P,T/T,MoneyGram,Western Union
- Supply Ability: 100-1000 set per week


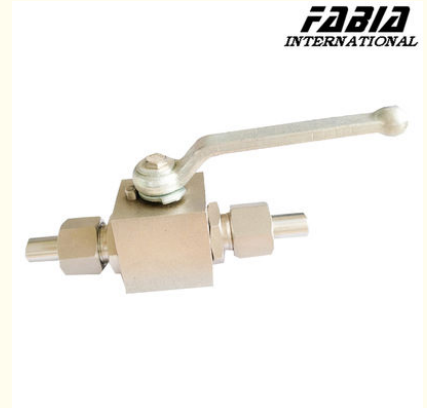


### Product Specification

- Product Name: Manual High Pressure Ball Valve
- Valve Type: High Pressure Ball Valve
- Body Material: Stainless Steel
- Operation Type: Manual
- Connection Type: Threaded
- Application: Petroleum, Chemical, Power, Etc.
- Seal Material: Metal Sealing
- Pressure Rating: Class 150-2500
- Pressure Test: PN16
- Size: 1/2-8 Inch
- Temperature Range: -20 ~+200
- Highlight: high pressure ss ball valves, PN16 ball valves, Ss Ball Valves PN16



### More Images



## Product Description

### FABIA Manual High Pressure Hard Seal Ball Valve

#### 1. Description:

Ball valve structure is divided into floating ball type and fixed ball type, and the connection form is flange connection, welding connection and thread connection.

#### 2. Specification:

FABIA Valve Parameter List	
Valve type:	Manual High Pressure Hard Seal Ball Valve
Size:	1/8 inch 8 inch
Material:	WCB,Q235B,2507,A105,CF8(304),CF8M(316),CF3M(316L),CF3(304L),PVC,ZG1Cr18Ni9Ti,ZG1Cr18Ni12Mo2Ti
Connection type:	Welded connection/flange connection/thread connection/clamp connection
Driving model:	Manual/Worm gear drive/Pneumatic/Electric
Pressure rating:	PN1.0 PN64,ANSI CLASS 150-900,JIS10-20K
Temperature:	-196 540
Model:	FB-Q.....

#### 3. Features:

Small flow resistance.

Simple structure.

Small size, light weight.


At present, the sealing surface material of the ball valve is plastic, and the sealing is good.


Easy to operate, open and close quickly, easy to remote control.

Easy maintenance, sealing rings are generally active, easy to disassemble and replace.

When fully open or fully closed, the sealing surface of the ball and the seat is isolated from the medium.

Medium will not cause the erosion of the sealing surface of the valve.

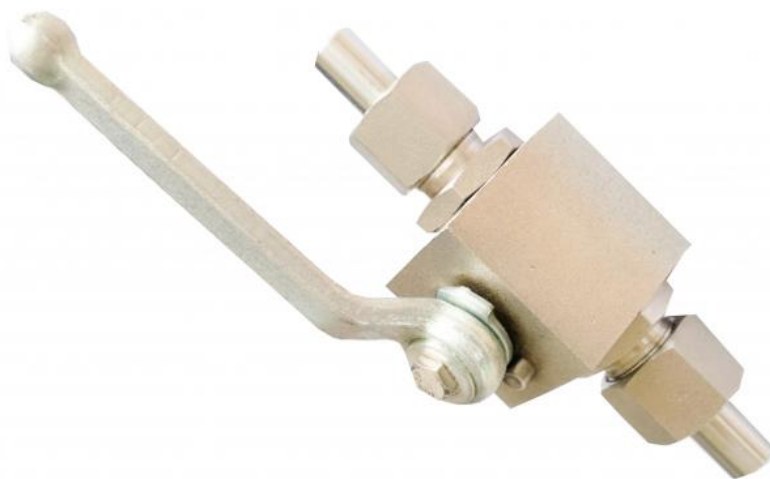

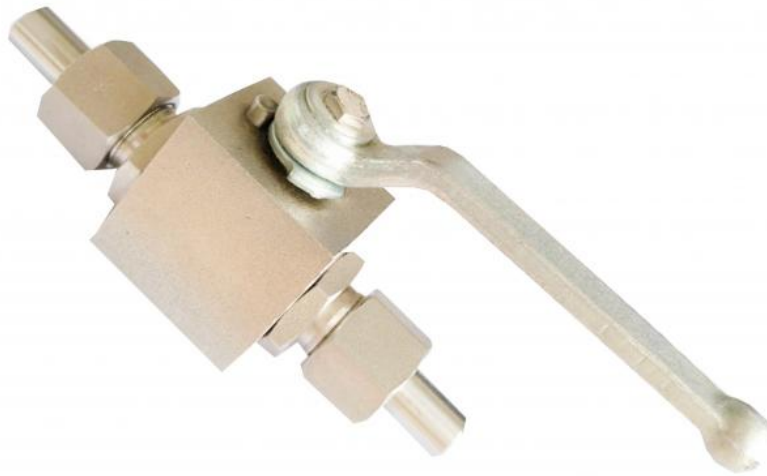

**Fabia Valve Industry (Suzhou) Co., Ltd.**



+8618913247051/+8618912658215/+8618260178084



sales@fabia-china.com



fbballvalve.com

Room 1305, Building 3, Jundi Business Plaza, No.3, Weihua Road, Suzhou Industrial Park