




## Three Eccentric Butterfly Valve Control Bring a Pneumatic Actuator

Our Product Introduction

for more products please visit us on [fbballvalve.com](http://fbballvalve.com)


### Basic Information

- Place of Origin: China
- Brand Name: FABIA
- Certification: ISO9001,CE,CCS,DNV
- Model Number: 1/8 inch 36 inch
- Minimum Order Quantity: 1 set
- Price: Negotiable
- Packaging Details: Cartons/Wooden cases
- Delivery Time: 15-30 work days
- Payment Terms: L/C,D/A,D/P,T/T,MoneyGram,Western Union
- Supply Ability: 100-1000 set per week

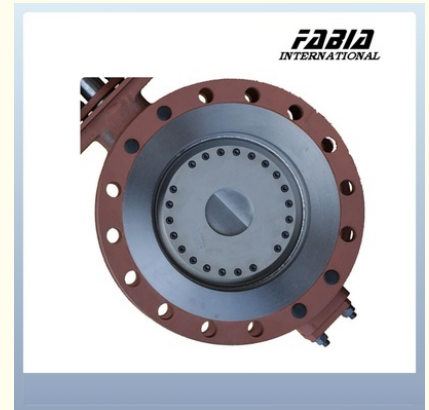

### Product Specification

- Product Name: Pneumatic Butterfly Valve
- Valve Design: Pneumatic Three Eccentric Butterfly Valve
- Valve Control: Pneumatic
- Valve Type: Butterfly
- Valve Application: Petroleum, Chemical, Power, Etc.
- Valve Material: GGG40
- Valve Operation: Pneumatic
- Valve Pressure: PN16
- Valve Temperature: -30 ~+135

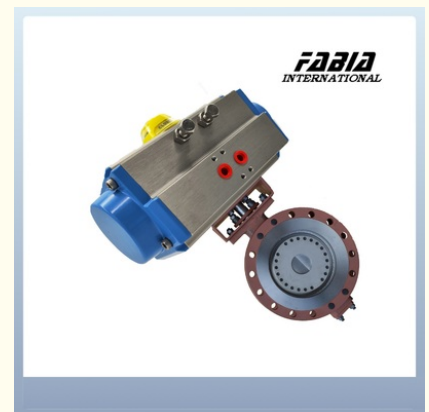

### More Images



## Product Description

### FABIA Three Eccentric Butterfly Valve Control Bring a Pneumatic Actuator

#### 1. Description:

Three eccentric butterfly valve is suitable for food.

Medicine. Petrochemicals. A power plant. A steel mill.

Industrial environmental protection water treatment and high-rise buildings.

Water supply and drainage pipe is used to regulate the flow rate and cut off the fluid device.

Use of three-dimensional eccentric sealing structure, small wear between the seat and the butterfly plate, and the sealing surface wear resistance, prolong the service life.

#### 2. Specification:

FABIA Valve Parameter List	
Valve type:	Pneumatic Three Eccentric Butterfly Valve
Size:	2 inch 36 inch
Material:	WCB,GGG40,FCD,SS304,SS304L,SS316,SS316L,ST37(Q235B),SS410
Connection type:	Butt Clamp/Flange Connection
Driving model:	Manual/Worm gear drive/Pneumatic/Electric
Pressure rating:	PN0.1 PN16
Temperature:	-40 1000
Model:	FB-D.....

#### 3. Features:

Small structure, light type, flexible operation, labor-saving, convenient.

Reliable sealing, can achieve gas seal without leakage.

Flow characteristics tend to be linearly regulated.

Three-eccentric principle is adopted to make the sealing surface approximate zero loss and extend the service life of the valve.

Wide range of applications. Such as: can be used for water, steam, oil, air, gas and other media.

Applicable to different temperatures and pressure levels below 6.4MPa, corrosion resistance and other medium pipelines.





**Fabia Valve Industry (Suzhou) Co., Ltd.**

+8618913247051/+8618912658215/+8618260178084

sales@fabia-china.com

fbballvalve.com

Room 1305, Building 3, Jundi Business Plaza, No.3, Weihua Road, Suzhou Industrial Park